



# IMPERIAL

## BRICKS

---

FJORD ROOFING & CLADDING



# FJORD

## CERAMIC CLADDING SYSTEM



Frost Resistant



Sustainable Materials




Weatherproof



Fire Class: Euroclass A1



Water Absorption  $\leq 6\%$



Colourfast



Graffiti Proof



Testing Conformity


### ELEVATE YOUR ARCHITECTURAL VISION

Discover the perfect blend of Nordic elegance and durability with our premium FJORD building tiles. Designed to withstand the harshest climates while adding a touch of minimalist beauty to any space, this collection of cladding tiles offer exceptional quality, sustainability, and timeless style.


With a range of natural textures and sophisticated finishes, our tiles aim to elevate your project with effortless Nordic charm. Available in nine stunning colourways – from crisp white and cool greys to the rich warmth of Scandinavian reds. This collection ensures the perfect match for any design vision.

A sustainably manufactured, natural building material with a focus on low-energy consumption during production and efficient use of resources.


### NINE COLOURS




001

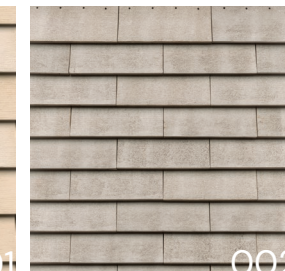


002




003




004



005



006



007



008



009

UK  
CA

Sedex Member



VERISIO

LUCIDEON  
providing material solutions




Further formats available upon request. The correct lath spacing must be determined on site. Screw holes must be sufficiently covered. Images are for guidance only, always request samples.






TWO FORMATS

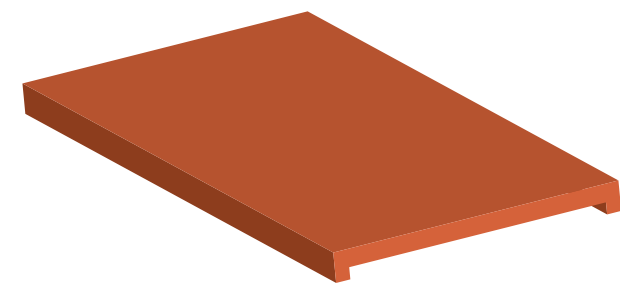


400mm x 250mm x 30mm

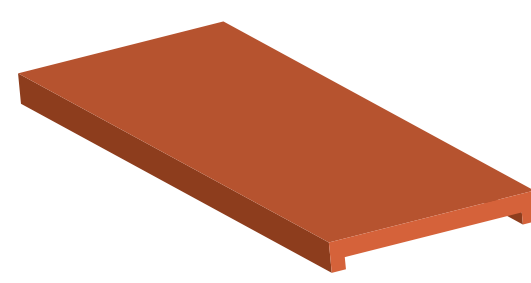

400mm x 250mm x 30mm

SUGGESTED INSTALLATION

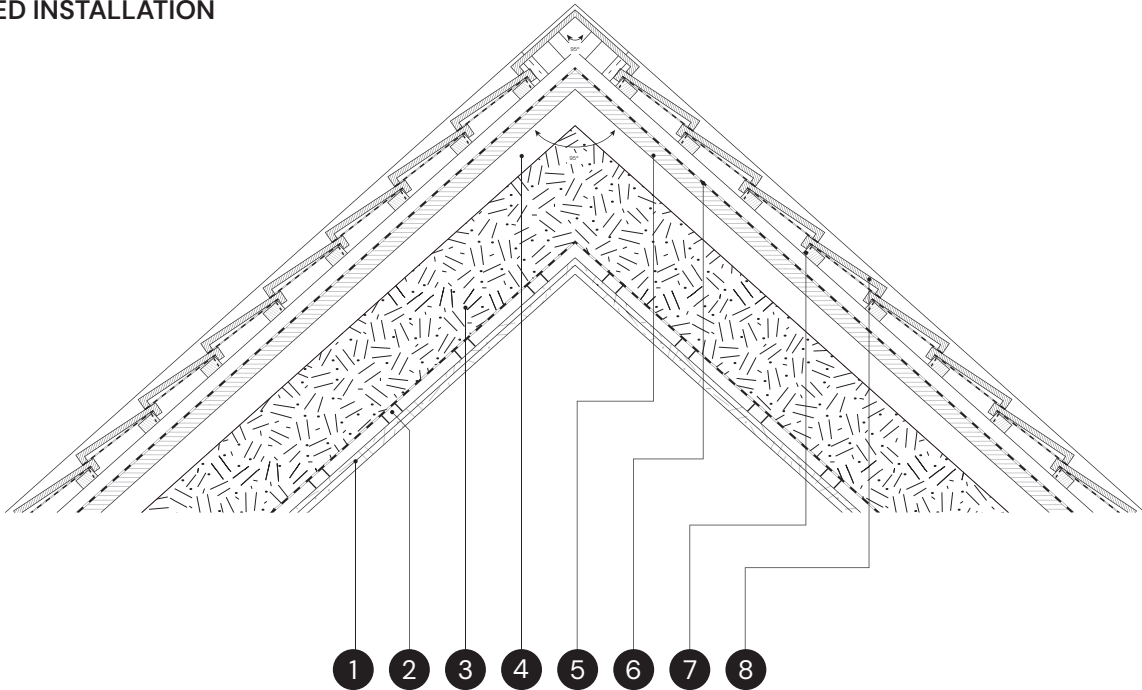

- 1 Gypsum plasterboard
- 2 Battens
- 3 Thermal insulation
- 4 Timber rafter
- 5 Wooden cladding & waterproof sealing
- 6 Battens
- 7 Thermal insulation
- 8 Timber rafter





**FITTING AND OPTIONAL EXTRAS**

FJORD tiles are installed using a ventilated façade system, which enhances building insulation and moisture management. The installation involves mounting the tiles onto a substructure of wooden battens or specially designed metal profiles, ensuring proper alignment and secure attachment.

To accommodate various architectural details, the FJORD system offers specialised components such as:

- Ridge tiles
- Outside and inside corner tiles
- Windowsill elements
- Snow guards

Further formats are available upon request. The correct lath spacing must be determinder on-site. Screw holes must be sufficiently covered. Images are for guidance only, always request samples.



OUTSIDE CORNER ACUTE



OUTSIDE CORNER OBTUSE



INNER CORNER



WINDOWSILL



STRAIGHT EDGE



STRAIGHT CUT



SNOW GUARD



ASSEMBLY EXAMPLE



ASSEMBLY EXAMPLE





	Thickness	Weight	Lath Spacing	Pieces Per m²
400mm x 175mm x 30mm	approx. 15mm	approx. 2.8kg	approx. 140mm	approx. 18 pieces
400mm x 250mm x 30mm	approx. 15mm	approx. 3.7kg	approx. 215mm	approx. 11 pieces

	Thickness	Weight	Lath Spacing	Pieces Per m²
400mm x 175mm x 30mm	approx. 15mm	approx. 2.8kg	approx. 140mm	approx. 18 pieces
400mm x 250mm x 30mm	approx. 15mm	approx. 3.7kg	approx. 215mm	approx. 11 pieces

	Thickness	Weight	Lath Spacing	Pieces Per m²
400mm x 175mm x 30mm	approx. 15mm	approx. 2.8kg	approx. 140mm	approx. 18 pieces
400mm x 250mm x 30mm	approx. 15mm	approx. 3.7kg	approx. 215mm	approx. 11 pieces







	Thickness	Weight	Lath Spacing	Pieces Per m²
400mm x 175mm x 30mm	approx. 15mm	approx. 2.8kg	approx. 140mm	approx. 18 pieces
400mm x 250mm x 30mm	approx. 15mm	approx. 3.7kg	approx. 215mm	approx. 11 pieces

	Thickness	Weight	Lath Spacing	Pieces Per m²
400mm x 175mm x 30mm	approx. 15mm	approx. 2.8kg	approx. 140mm	approx. 18 pieces
400mm x 250mm x 30mm	approx. 15mm	approx. 3.7kg	approx. 215mm	approx. 11 pieces

	Thickness	Weight	Lath Spacing	Pieces Per m²
400mm x 175mm x 30mm	approx. 15mm	approx. 2.8kg	approx. 140mm	approx. 18 pieces
400mm x 250mm x 30mm	approx. 15mm	approx. 3.7kg	approx. 215mm	approx. 11 pieces








	Thickness	Weight	Lath Spacing	Pieces Per m²
400mm x 175mm x 30mm	approx. 15mm	approx. 2.8kg	approx. 140mm	approx. 18 pieces
400mm x 250mm x 30mm	approx. 15mm	approx. 3.7kg	approx. 215mm	approx. 11 pieces

	Thickness	Weight	Lath Spacing	Pieces Per m²
400mm x 175mm x 30mm	approx. 15mm	approx. 2.8kg	approx. 140mm	approx. 18 pieces
400mm x 250mm x 30mm	approx. 15mm	approx. 3.7kg	approx. 215mm	approx. 11 pieces

	Thickness	Weight	Lath Spacing	Pieces Per m²
400mm x 175mm x 30mm	approx. 15mm	approx. 2.8kg	approx. 140mm	approx. 18 pieces
400mm x 250mm x 30mm	approx. 15mm	approx. 3.7kg	approx. 215mm	approx. 11 pieces

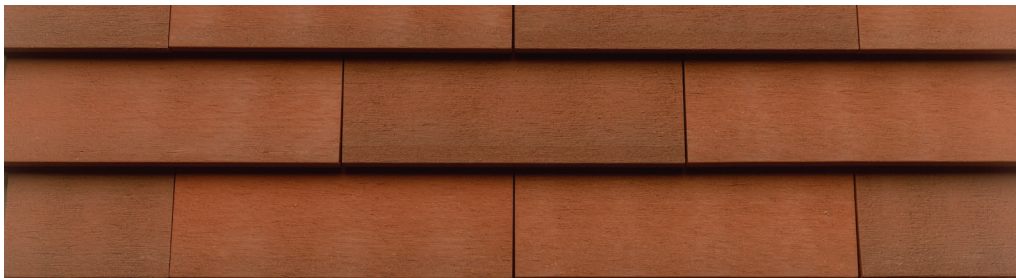





[www.imperialbricks.co.uk](http://www.imperialbricks.co.uk)  
[sales@imperialbricks.co.uk](mailto:sales@imperialbricks.co.uk)  
01746 330994