



PORCELAIN

BY IMPERIAL

Big impact, built in.

At Imperial, we understand that every build deserves materials that combine durability, style, and value.

This selected range of porcelain and ceramic tiles has been carefully curated specifically for SME developers, offering versatile solutions that meet the rigorous demands of modern residential, commercial projects.

From sleek contemporary modern finishes to timeless natural earth tones, our range of tiles deliver exceptional performance, easy installation, and long lasting style.

We supply direct from manufacturer, with further stock holdings in the UK. These are all available for immediate delivery to ensure a seamless, direct to site experience.

Whether you're designing a single unit or a multi site development, our collections bring together design excellence and technical innovation to help you build spaces that stand out and stand the test of time.



contents

INTRO
COLLECTIONS
Soft Stone
Bedrock
Terrazzo
Matrix
Precious
Kech
Legacy
Nest
Woodline
INDEX
COLOUR MAP




SOFT STONE

THREE COLOURS



FOUR FORMATS

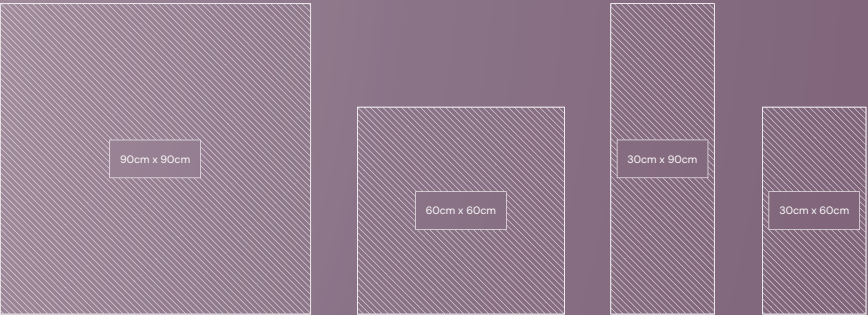

THREE THICKNESSES



ONE FINISH

NMR Natural matt rectified 90 x 90 / 60 x 60 / 30 x 90 / 30 x 60

SOFT STONE – WHITE



Base – 90 x 90cm



Base – 60 x 60cm



Base – 30 x 90cm



Cast – 30 x 90cm



Base – 30 x 60cm



Astral 30 x 60cm

Size	Usage	Int/Ext	Thickness	Finish	Anti-slip DIN EN16165 (Annex A)	Anti-slip DIN EN16165 (Annex B)	Anti-slip DIN EN16165 (Annex C)	Frost Resistant	Shade Variation	Product Code
90 x 90 cm		Internal	9 mm		B	R10	≥36		V2 – Low	09901R08971
60 x 60 cm		Internal	8 mm		B	R10	≥36		V2 – Low	09661R08971
30 x 90 cm		Internal	8 mm		–	–	–	–	–	08391R08971
30 x 90 cm		Internal	8 mm		–	–	–	–	–	08391R09001
30 x 60 cm		Internal	7 mm		–	–	–	–	–	08361R08971
30 x 60cm		Internal	7 mm		–	–	–	–	–	08361R09061

 Single fired wall tiles  Floor tiles  Floor and wall tiles  Matt structured wall tiles  Frost resistant  Natural matt rectified  Natural matt pressed  Anti-slip rectified  Polished  Shine  Gloss



SOFT STONE – BEIGE



Base – 90 x 90cm



Base – 60 x 60cm



Base – 30 x 90cm



Cast – 30 x 90cm



Base – 30 x 60cm



Astral 30 x 60cm

Size	Usage	Int/Ext	Thickness	Finish	Anti-slip DIN EN16165 (Annex A)	Anti-slip DIN EN16165 (Annex B)	Anti-slip DIN EN16165 (Annex C)	Frost Resistant	Shade Variation	Product Code
90 x 90 cm		Internal	9 mm	NMR	B	R10	≥36		V2 – Low	09901R08981
60 x 60 cm		Internal	8 mm	NMR	B	R10	≥36		V2 – Low	09661R08981
30 x 90 cm		Internal	8 mm	NMR	–	–	–	–	–	08391R08981
30 x 90 cm		Internal	8 mm	NMR	–	–	–	–	–	08391R09011
30 x 60 cm		Internal	7 mm	NMR	–	–	–	–	–	08361R08981
30 x 60cm		Internal	7 mm	NMR	–	–	–	–	–	08361R09071

Single fired wall tiles Floor tiles Floor and wall tiles Matt structured wall tiles Frost resistant NMR Natural matt rectified NMP Natural matt pressed ASR Anti-slip rectified PL Polished SH Shine GL Gloss



SOFT STONE – LIGHT GREY



Base – 90 x 90cm



Base – 60 x 60cm



Base – 30 x 90cm



Cast – 30 x 90cm



Base – 30 x 60cm



Astral 30 x 60cm

Size	Usage	Int/Ext	Thickness	Finish	Anti-slip DIN EN16165 (Annex A)	Anti-slip DIN EN16165 (Annex B)	Anti-slip DIN EN16165 (Annex C)	Frost Resistant	Shade Variation	Product Code
90 x 90 cm		Internal	9 mm	NMR	B	R10	≥36		V2 – Low	09901R08991
60 x 60 cm		Internal	8 mm	NMR	B	R10	≥36		V2 – Low	09661R08991
30 x 90 cm		Internal	8 mm	NMR	–	–	–	–	–	08391R08991
30 x 90 cm		Internal	8 mm	NMR	–	–	–	–	–	08391R09021
30 x 60 cm		Internal	7 mm	NMR	–	–	–	–	–	08361R08991
30 x 60cm		Internal	7 mm	NMR	–	–	–	–	–	08361R09081

Single fired wall tiles Floor tiles Floor and wall tiles Matt structured wall tiles Frost resistant NMR Natural matt rectified NMP Natural matt pressed ASR Anti-slip rectified PL Polished SH Shine GL Gloss





BEDROCK

TWO COLOURS



THREE FORMATS



TWO THICKNESSES



TWO FINISHES

NMR	Natural matt rectified	90 x 90 / 60 x 60 / 30 x 60
ASR	Anti-slip rectified	60 x 60

BEDROCK – LIGHT



Base – 90 x 90cm



Base – 60 x 60cm



Base – 30 x 90cm

Size	Usage	Int/Ext	Thickness	Finish	Anti-slip DIN EN16165 (Annex A)	Anti-slip DIN EN16165 (Annex B)	Anti-slip DIN EN16165 (Annex C)	Frost Resistant	Shade Variation	Product Code
90 x 90 cm		Internal	9 mm		–	–	–		V2 – Low	03901R06921
60 x 60 cm		Internal	8 mm		–	–	–		V2 – Low	03661R06921
30 x 60 cm		Internal	8 mm		–	–	–		V2 – Low	03361O06921
60 x 60 cm		Internal	8 mm		C	R11	≥36		V2 – Low	03661O08531

 Single fired wall tiles  Floor tiles  Floor and wall tiles  Matt structured wall tiles  Frost resistant  Natural matt rectified  Natural matt pressed  Anti-slip rectified  Polished  Shine  Gloss



BEDROCK – FOG



Base – 90 x 90cm



Base – 60 x 60cm



Base – 30 x 90cm

Size	Usage	Int/Ext	Thickness	Finish	Anti-slip DIN EN16165 (Annex A)	Anti-slip DIN EN16165 (Annex B)	Anti-slip DIN EN16165 (Annex C)	Frost Resistant	Shade Variation	Product Code
90 x 90 cm		Internal	9 mm	NMR	–	–	–		V2 – Low	03901R06951
60 x 60 cm		Internal	8 mm	NMR	–	–	–		V2 – Low	03661R06951
30 x 60 cm		Internal	8 mm	NMR	–	–	–		V2 – Low	03361006951
60 x 60 cm		Internal	8 mm	ASR	C	R11	≥36		V2 – Low	03661008551

Single fired wall tiles Floor tiles Floor and wall tiles Matt structured wall tiles Frost resistant Natural matt rectified Natural matt pressed Anti-slip rectified Polished Shine Gloss






TERRAZZO

ONE COLOUR



ONE FORMAT



ONE THICKNESS

8mm




ONE FINISH

NMR

Natural matt rectified

60 x 60

TERRAZZO – WHITE



Base – 60cm x 60cm

Size	Usage	Int/Ext	Thickness	Finish	Anti-slip DIN EN16165 (Annex A)	Anti-slip DIN EN16165 (Annex B)	Anti-slip DIN EN16165 (Annex C)	Frost Resistant	Shade Variation	Product Code
60 x 60 cm		Internal	8 mm		B	R10	≥36		V3 – Medium	03661R06911

-  Single fired wall tiles
-  Floor tiles
-  Floor and wall tiles
-  Matt structured wall tiles
-  Frost resistant
-  Natural matt rectified
-  Natural matt pressed
-  Anti-slip rectified
-  Polished
-  Shine
-  Gloss






MATRIX

TWO COLOURS



TWO FORMATS

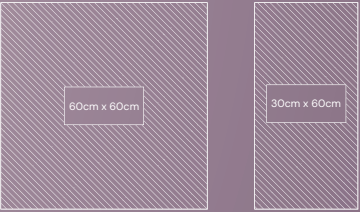

ONE THICKNESS




TWO FINISHES

NMR	Natural matt rectified	60 x 60 / 30 x 60
ASR	Anti- slip rectified	60 x 60

MATRIX – BEIGE



Base – 60cm x 60cm



Base – 30 x 60cm

Size	Usage	Int/Ext	Thickness	Finish	Anti-slip DIN EN16165 (Annex A)	Anti-slip DIN EN16165 (Annex B)	Anti-slip DIN EN16165 (Annex C)	Frost Resistant	Shade Variation	Product Code
60 x 60 cm		Internal	8 mm		–	–	–		V2 – Low	03661R03521
30 x 60 cm		Internal	8 mm		–	–	–		V2 – Low	03361R03521
60 x 60 cm		Internal	8 mm		C	R11	≥36		V2 – Low	03661R08501

Single fired wall tiles Floor tiles Floor and wall tiles Matt structured wall tiles Frost resistant Natural matt rectified Natural matt pressed Anti-slip rectified Polished Shine Gloss



MATRIX – CINZA



Base – 60cm x 60cm



Base – 30 x 60cm

Size	Usage	Int/Ext	Thickness	Finish	Anti-slip DIN EN16165 (Annex A)	Anti-slip DIN EN16165 (Annex B)	Anti-slip DIN EN16165 (Annex C)	Frost Resistant	Shade Variation	Product Code
60 x 60 cm		Internal	8 mm	NMR	-	-	-		V2 - Low	03661R03531
30 x 60 cm		Internal	8 mm	NMR	-	-	-		V2 - Low	03361R03531
60 x 60 cm		Internal	8 mm	NMR	C	R11	≥36		V2 - Low	03661R08511

Single fired wall tiles Floor tiles Floor and wall tiles Matt structured wall tiles Frost resistant Natural matt rectified Natural matt pressed Anti-slip rectified Polished Shine Gloss





LIGHT GREY

GREY




BEIGE

PRECIOUS

TWO COLOURS



THREE FORMATS



THREE THICKNESS



TWO FINISHES

NMR Natural matt rectified
PL Polished

80 x 80 / 60 x 60
79 x 79 / 60 x 60 / 35 x 70

PRECIOUS – CALACATTA




Base – 80 x 80cm



Base – 79 x 79cm



Base – 60 x 60cm

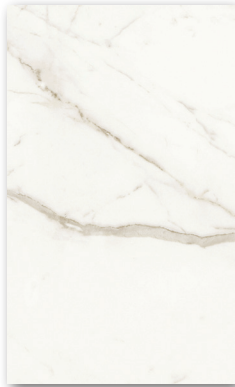

Base – 35 x 70cm

Size	Usage	Int/Ext	Thickness	Finish	Anti-slip DIN EN16165 (Annex A)	Anti-slip DIN EN16165 (Annex B)	Anti-slip DIN EN16165 (Annex C)	Frost Resistant	Shade Variation	Product Code
80 x 80 cm		Internal	9 mm		-	-	-		V1 – Minor	B608.0015.001K
79 x 79 cm		Internal	9 mm		-	-	-		V1 – Minor	B608.0016.001K
60 x 60 cm		Internal	8.5 mm		-	-	-		V1 – Minor	B615.0055.001X
60 x 60 cm		Internal	8.5 mm		-	-	-		V1 – Minor	B615.0048.001X
35 x 70 cm		Internal	8 mm		-	-	-	-	-	B629.0128.095K

Single fired wall tiles Floor tiles Floor and wall tiles Matt structured wall tiles Frost resistant Natural matt rectified Natural matt pressed Anti-slip rectified Polished Shine Gloss




PRECIOUS – CALACATTA GOLD




Base – 80 x 80cm



Base – 79 x 79cm

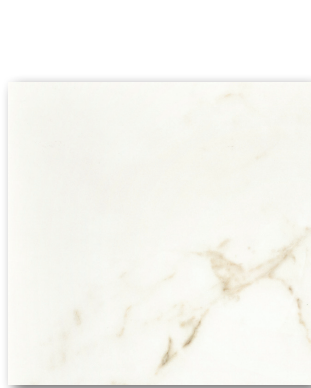

Base – 60 x 60cm

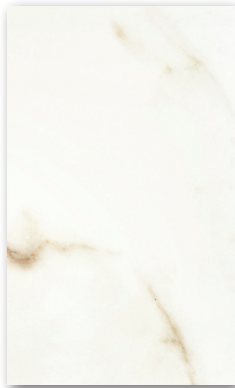

Base – 35 x 70cm

Size	Usage	Int/Ext	Thickness	Finish	Anti-slip DIN EN16165 (Annex A)	Anti-slip DIN EN16165 (Annex B)	Anti-slip DIN EN16165 (Annex C)	Frost Resistant	Shade Variation	Product Code
80 x 80 cm		Internal	9 mm	NMR	-	-	-		V1 – Minor	B608.0015.080K
79 x 79 cm		Internal	9 mm	PL	-	-	-		V1 – Minor	B608.0016.080K
60 x 60 cm		Internal	8.5 mm	NMR	-	-	-		V1 – Minor	B615.0058.080X
60 x 60 cm		Internal	8.5 mm	PL	-	-	-		V1 – Minor	B615.0059.080X
35 x 70 cm		Internal	8 mm	SH	-	-	-	-	-	B629.0155.095K


Single fired wall tiles Floor tiles Floor and wall tiles Matt structured wall tiles Frost resistant Natural matt rectified Natural matt pressed Anti-slip rectified Polished Shine Gloss






KECH


FIVE COLOURS

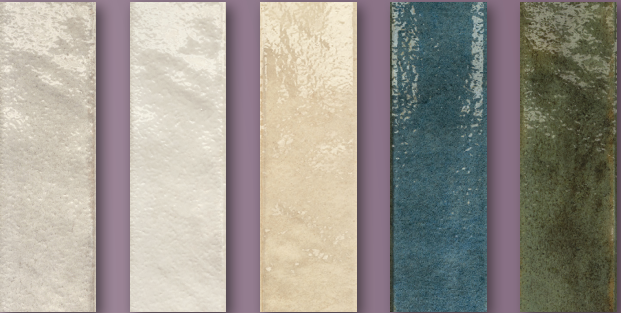

TWO FORMATS

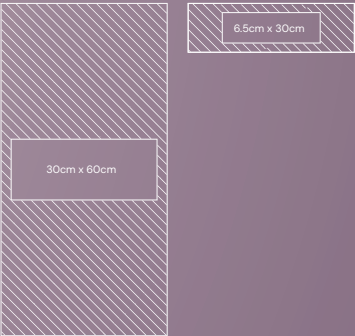

ONE THICKNESS



ONE FINISH

GL Gloss 30 x 60 / 6.5 x 30

KECH – FOG



Base – 30 x 60cm



Base – 6.5 x 30cm

Size	Usage	Int/Ext	Thickness	Finish	Anti-slip DIN EN16165 (Annex A)	Anti-slip DIN EN16165 (Annex B)	Anti-slip DIN EN16165 (Annex C)	Frost Resistant	Shade Variation Low	Product Code
30 x 60cm		Internal/External	8 mm	GL	-	-	-		V3 – Moderate	03367008001
6.5 x 30cm		Internal/External	8 mm	GL	-	-	-		V3 – Moderate	03067C08001


Single fired wall tiles Floor tiles Floor and wall tiles Matt structured wall tiles Frost resistant NMR Natural matt rectified ASR Anti-slip rectified PL Polished SH Shine GL Gloss



KECH – WHITE



Base – 30 x 60cm



Base – 6.5 x 30cm

Size	Usage	Int/Ext	Thickness	Finish	Anti-slip DIN EN16165 (Annex A)	Anti-slip DIN EN16165 (Annex B)	Anti-slip DIN EN16165 (Annex C)	Frost Resistant	Shade Variation Low	Product Code
30 x 60cm		Internal/External	8 mm		-	-	-		V3 – Moderate	03367007991
6.5 x 30cm		Internal/External	8 mm		-	-	-		V3 – Moderate	03067C07991

 Single fired wall tiles  Floor tiles  Floor and wall tiles  Matt structured wall tiles  Frost resistant  Natural matt rectified  Anti-slip rectified  Polished  Shine  Gloss



KECH – SAND



Base – 30 x 60cm



Base – 6.5 x 30cm

Size	Usage	Int/Ext	Thickness	Finish	Anti-slip DIN EN16165 (Annex A)	Anti-slip DIN EN16165 (Annex B)	Anti-slip DIN EN16165 (Annex C)	Frost Resistant	Shade Variation Low	Product Code
30 x 60cm		Internal/External	8 mm		-	-	-		V3 – Moderate	03367008761
6.5 x 30cm		Internal/External	8 mm		-	-	-		V3 – Moderate	03067C08761


 Single fired wall tiles  Floor tiles  Floor and wall tiles  Matt structured wall tiles  Frost resistant  Natural matt rectified  Anti-slip rectified  Polished  Shine  Gloss



KECH – COBALT



Base – 30 x 60cm



Base – 6.5 x 30cm

Size	Usage	Int/Ext	Thickness	Finish	Anti-slip DIN EN16165 (Annex A)	Anti-slip DIN EN16165 (Annex B)	Anti-slip DIN EN16165 (Annex C)	Frost Resistant	Shade Variation Low	Product Code
30 x 60cm		Internal/External	8 mm		-	-	-		V3 – Moderate	03367008041
6.5 x 30cm		Internal/External	8 mm		-	-	-		V3 – Moderate	03067C08041


 Single fired wall tiles  Floor tiles  Floor and wall tiles  Matt structured wall tiles  Frost resistant  Natural matt rectified  Anti-slip rectified  Polished  Shine  Gloss



KECH – JADE



Base – 30 x 60cm



Base – 6.5 x 30cm

Size	Usage	Int/Ext	Thickness	Finish	Anti-slip DIN EN16165 (Annex A)	Anti-slip DIN EN16165 (Annex B)	Anti-slip DIN EN16165 (Annex C)	Frost Resistant	Shade Variation Low	Product Code
30 x 60cm		Internal/External	8 mm	GL	–	–	–		V3 – Moderate	03367008031
6.5 x 30cm		Internal/External	8 mm	GL	–	–	–		V3 – Moderate	03067C08031

-  Single fired wall tiles
-  Floor tiles
-  Floor and wall tiles
-  Matt structured wall tiles
-  Frost resistant
-  Natural matt rectified
-  Anti-slip rectified
-  Polished
-  Shine
-  Gloss





LEGACY

THREE COLOURS



THREE FORMATS




THREE THICKNESSES



TWO FINISHES

NMR	Natural Matt Rectified	80 x 80 / 60 x 60 / 30 x 60
EASR	Extra Anti-slip rectified	80 x 80

LEGACY – WHITE

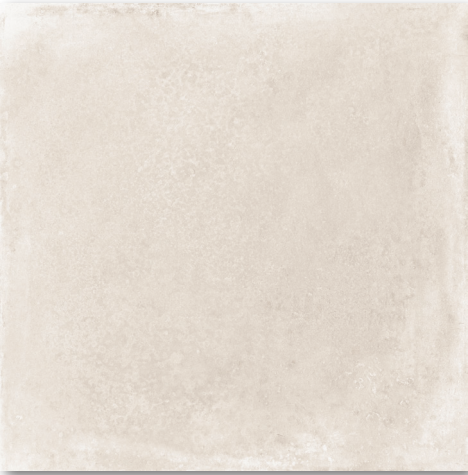

Base – 80 x 80cm



Base – 60 x 60cm



Base – 30 x 60cm

Size	Usage	Int/Ext	Thickness	Finish	Anti-slip DIN EN16165 (Annex A)	Anti-slip DIN EN16165 (Annex B)	Anti-slip DIN EN16165 (Annex C)	Frost Resistant	Shade Variation	Product Code
80 x 80 cm		Internal	9 mm	NMR	B	R10	≥36		V3 - Medium	B608.0027.001
60 x 60 cm		Internal	8 mm	NMR	B	R10	≥36		V3 - Medium	B615.0075.001
30 x 60 cm		Internal	8 mm	NMR	B	R10	≥36		V3 - Medium	B631.0045.001
80 x 80 cm		External	20 mm	ASR	C	R11	≥36		V3 - Medium	B608.0028.001



LEGACY – LIGHT GREY



Base – 80 x 80cm



Base – 60 x 60cm



Base – 30 x 60cm

Size	Usage	Int/Ext	Thickness	Finish	Anti-slip DIN EN16165 (Annex A)	Anti-slip DIN EN16165 (Annex B)	Anti-slip DIN EN16165 (Annex C)	Frost Resistant	Shade Variation	Product Code
80 x 80 cm		Internal	9 mm		B	R10	≥36		V3 – Medium	B608.0027.047
60 x 60 cm		Internal	8 mm		B	R10	≥36		V3 – Medium	B615.0075.047
30 x 60 cm		Internal	8 mm		B	R10	≥36		V3 – Medium	B631.0045.047
80 x 80 cm		External	20 mm		C	R11	≥36		V3 – Medium	B608.0028.047

Single fired wall tiles Floor tiles Floor and wall tiles Matt structured wall tiles Frost resistant Natural matt rectified Anti-slip rectified Polished Shine Gloss



LEGACY – BEIGE



Base – 80 x 80cm



Base – 60 x 60cm



Base – 30 x 60cm

Size	Usage	Int/Ext	Thickness	Finish	Anti-slip DIN EN16165 (Annex A)	Anti-slip DIN EN16165 (Annex B)	Anti-slip DIN EN16165 (Annex C)	Frost Resistant	Shade Variation	Product Code
80 x 80 cm		Internal	9 mm	NMR	B	R10	≥36		V3 - Medium	B608.0027.002
60 x 60 cm		Internal	8 mm	NMR	B	R10	≥36		V3 - Medium	B615.0075.002
30 x 60 cm		Internal	8 mm	NMR	B	R10	≥36		V3 - Medium	B631.0045.002
80 x 80 cm		External	20 mm	ASR	C	R11	≥36		V3 - Medium	B608.0028.002


Single fired wall tiles Floor tiles Floor and wall tiles Matt structured wall tiles Frost resistant Natural matt rectified Anti-slip rectified Polished Shine Gloss






LIGHT


ONE COLOUR



TWO FORMATS



TWO THICKNESSES



ONE FINISH

NMR Natural Matt Rectified 60 x 60 30 x 60

LIGHT – WHITE



Base – 60 x 60cm Base – 30 x 60cm

Size	Usage	Int/Ext	Thickness	Finish	Anti-slip DIN EN16165 (Annex A)	Anti-slip DIN EN16165 (Annex B)	Anti-slip DIN EN16165 (Annex C)	Frost Resistant	Shade Variation	Product Code
60 x 60 cm		Internal	8 mm	NMR	-	-	-		VO – None	B615.0029.096K
30 x 60 cm		Internal	7 mm	NMR	-	-	-		VO – None	B669.0044.096K






NEST

THREE COLOURS



TWO FORMATS

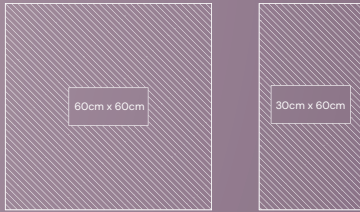

TWO THICKNESSES



ONE FINISH

NMP Natural matt pressed 60 x 60 / 30 x 60

NEST – WHITE



Base – 60 x 60cm



Base – 30 x 60cm



Comfy – 30 x 60cm

Size	Usage	Int/Ext	Thickness	Finish	Anti-slip DIN EN16165 (Annex A)	Anti-slip DIN EN16165 (Annex B)	Anti-slip DIN EN16165 (Annex C)	Frost Resistant	Shade Variation	Product Code
60 x 60 cm		Internal	8 mm		–	–	–		V2 – Low	B612.0031.001KZ
30 x 60 cm		Internal	7 mm		–	–	–	–	V2 – Low	B668.0028.001KZ
30 x 60 cm		Internal	7.5-7.7 mm		–	–	–	–	–	B668.0029.001KZ

Single fired wall tiles Floor tiles Floor and wall tiles Matt structured wall tiles Frost resistant Natural matt rectified Natural matt pressed Anti-slip rectified Polished Shine Gloss



NEST – BEIGE



Base – 60 x 60cm



Base – 30 x 60cm



Comfy – 30 x 60cm

Size	Usage	Int/Ext	Thickness	Finish	Anti-slip DIN EN16165 (Annex A)	Anti-slip DIN EN16165 (Annex B)	Anti-slip DIN EN16165 (Annex C)	Frost Resistant	Shade Variation	Product Code
60 x 60 cm		Internal	8 mm	NMP	–	–	–		V2 – Low	B612.0031.002KZ
30 x 60 cm		Internal	7 mm	NMP	–	–	–	–	V2 – Low	B668.0028.002KZ
30 x 60 cm		Internal	7,5-7,7 mm	NMP	–	–	–	–	–	B668.0029.002KZ

Single fired wall tiles Floor tiles Floor and wall tiles Matt structured wall tiles Frost resistant NMR Natural matt rectified NMP Natural matt pressed ASR Anti-slip rectified PL Polished SH Shine GL Gloss



NEST – GREY



Base – 60 x 60cm



Base – 30 x 60cm



Comfy – 30 x 60cm

Size	Usage	Int/Ext	Thickness	Finish	Anti-slip DIN EN16165 (Annex A)	Anti-slip DIN EN16165 (Annex B)	Anti-slip DIN EN16165 (Annex C)	Frost Resistant	Shade Variation	Product Code
60 x 60 cm		Internal	8 mm	NMP	–	–	–		V2 – Low	B612.0031003KZ
30 x 60 cm		Internal	7 mm	NMP	–	–	–	–	V2 – Low	B668.0028.003KZ
30 x 60 cm		Internal	7.5–7.7 mm	NMP	–	–	–	–	–	B668.0029.003KZ

Single fired wall tiles Floor tiles Floor and wall tiles Matt structured wall tiles Frost resistant NMR Natural matt rectified NMP Natural matt pressed ASR Anti-slip rectified PL Polished SH Shine GL Gloss






WOODLINE

FOUR COLOURS




TWO FORMATS

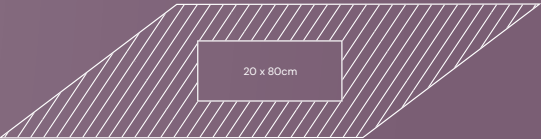

ONE THICKNESS

8mm



TWO FINISHES

NMR	Natural matt rectified	20 x 100 / 20 x 80
ASR	Anti slip rectified	20 x 100

WOODLINE – LIGHT BEIGE



Base – 20 x 100cm



Base – 20 x 80cm

Size	Usage	Int/Ext	Thickness	Finish	Anti-slip DIN EN16165 (Annex A)	Anti-slip DIN EN16165 (Annex B)	Anti-slip DIN EN16165 (Annex C)	Frost Resistant	Shade Variation	Product Code
20 x 100 cm		Internal	8 mm	NMR	–	–	–		V1 – Minor	B609.0009.034
20 x 100 cm		Internal/External	8 mm	ASR	C	R11	≥36		V1 – Minor	B609.0010.034
20 x 80 cm		Internal	8 mm	NMR	–	–	–		V1 – Minor	B664.0177.034Z

Single fired wall tiles Floor tiles Floor and wall tiles Matt structured wall tiles Frost resistant Natural matt rectified Natural matt pressed Anti-slip rectified Polished Shine Gloss



WOODLINE – LIGHT BROWN



Base – 20 x 100cm



Base – 20 x 80cm

Size	Usage	Int/Ext	Thickness	Finish	Anti-slip DIN EN16165 (Annex A)	Anti-slip DIN EN16165 (Annex B)	Anti-slip DIN EN16165 (Annex C)	Frost Resistant	Shade Variation	Product Code
20 x 100 cm		Internal	8 mm	NMR	–	–	–		V1 – Minor	B609.0009.005
20 x 100 cm		Internal/External	8 mm	ASR	C	R11	≥36		V1 – Minor	B609.0010.005
20 x 80 cm		Internal	8 mm	NMR	–	–	–		V1 – Minor	B664.0177.005Z

Single fired wall tiles Floor tiles Floor and wall tiles Matt structured wall tiles Frost resistant Natural matt rectified Natural matt pressed Anti-slip rectified Polished Shine Gloss



WOODLINE – BEIGE



Base – 20 x 100cm



Base – 20 x 80cm

Size	Usage	Int/Ext	Thickness	Finish	Anti-slip DIN EN16165 (Annex A)	Anti-slip DIN EN16165 (Annex B)	Anti-slip DIN EN16165 (Annex C)	Frost Resistant	Shade Variation	Product Code
20 x 100 cm		Internal	8 mm	NMR	-	-	-		V1 – Minor	B609.0009.002
20 x 100 cm		Internal/External	8 mm	ASR	C	R11	≥36		V1 – Minor	B609.0010.002
20 x 80 cm		Internal	8 mm	NMR	-	-	-		V1 – Minor	B664.0177.002Z

Single fired wall tiles Floor tiles Floor and wall tiles Matt structured wall tiles Frost resistant NMR Natural matt rectified NMP Natural matt pressed ASR Anti-slip rectified PL Polished SH Shine GL Gloss



WOODLINE – GREY



Base – 20 x 100cm



Base – 20 x 80cm

Size	Usage	Int/Ext	Thickness	Finish	Anti-slip DIN EN16165 (Annex A)	Anti-slip DIN EN16165 (Annex B)	Anti-slip DIN EN16165 (Annex C)	Frost Resistant	Shade Variation	Product Code
20 x 100 cm		Internal	8 mm	NMR	–	–	–		V1 – Minor	B609.009.003
20 x 100 cm		Internal/External	8 mm	ASR	C	R11	≥36		V1 – Minor	B609.0010.003
20 x 80 cm		Internal	8 mm	NMR	–	–	–		V1 – Minor	B664.0177.003Z

Single fired wall tiles Floor tiles Floor and wall tiles Matt structured wall tiles Frost resistant Natural matt rectified Natural matt pressed Anti-slip rectified Polished Shine Gloss





KEY


 Single fired wall tiles	 Natural matt pressed
 Floor tiles	 Anti-slip rectified
 Floor and wall tiles	 Polished
 Matt structured wall tiles	 Shine
 Frost resistant	 Gloss
 Natural matt rectified	


SPECIAL PIECES


Available in all colours



Skirting
9 x 90 R
9 x 60 R


Step tread “L”
30 x 90 R
30 x 60 R


Step tread “L” corner
30 x 90 R
30 x 60 R


Step tread grooved
30 x 90 R
30 x 60 R


Step tread grooved “L”
30 x 90 R
30 x 60 R


Step tread grooved “L” corner
30 x 90 R
30 x 60 R

TECHNICAL INFORMATION

EN14411: ANNEX G – ISO 13006 ANNEX LG – GROUP BIA UGL

Technical Features	Test Method	Prescribed Value	Typical Value
Dimensions – length & width	EN ISO 10545-2	Non Rect. ± 0,6%, max ± 2,0mm Rect. ± 0,3%, max ± 1,0mm	Conform
Side straightness	EN ISO 10545-2	Non Rect. ± 0,5%, max ± 2 mm Rect. ± 0,3%, max ± 1,5 mm	Conform
Rectangularity	EN ISO 10545-2	Non Rect. ± 0,5%, max ± 2,0 mm Rect. ± 0,3%, max ± 1,5 mm	Conform
Warpage – Centre and edge curvature	EN ISO 10545-2	Non Rect. ± 0,5%, max ± 2,0 mm Rect. ± 0,4%, max ± 1,8 mm	Conform
Warpage	EN ISO 10545-2	Non Rect. ± 0,5%, max ± 2,0 mm Rect. ± 0,4%, max ± 1,8 mm	Conform
Thickness	EN ISO 10545-2	± 10% , max ± 0,5 mm	Conform
Water Absorption	EN ISO 10545-3	E > 10%	Conform
Modulus of rupture	EN ISO 10545-4	< 7,5mm ≥ 15 N/mm² ≥ 7,5mm ≥ 12 N/mm²	Conform
Breaking strength	EN ISO 10545-4	< 7,5mm S ≥ 200 N ± 7,5mm S ≥ 600 N	Conform
Linear thermal expansion	EN ISO 10545-8	As indicated by manufacturer	a ≤ 7,5x10-6 °C-1 Max. Value
Thermal shock resistance	EN ISO 10545-9	Required	Conform
Crazing resistance	EN ISO 10545-11	Required	Conform
Resistance against acids and alkalis	EN ISO 10545-13	As indicated by manufacturer	GLB
Resistance to household cleaning products	EN ISO 10545-13	Minimum: GB	Conform
Stain resistance	EN ISO 10545-14	Minimum: Class 3	Conform

IMPORTANT INFORMATION

It is guaranteed the compliance with the values required by norm EN14411_Group BIA GL. Typical value is merely indicative, which can vary from real data, and does not have the purpose of any trading proposal. The technical characteristics stated in this document do not invalidate the consultation of updated information on the website and technical data sheets. All images shown are for illustrative purposes only. Gresart, SA reserves the right to change and or cancel, in whole or in any part, any of the formats, references and technical specifications presented in this catalogue. The dimensions shown in this catalogue correspond to nominal (approx.) dimensions, so please confirm the exact dimensions in the calibre table of the different formats. The weights shown in the packing list are indicative only.





www.imperialbricks.co.uk
sales@imperialbricks.co.uk
01746 330994