




COALPORT SALVAGE



PRODUCT CODE	HCRT/VT/SALV
TILE TYPE	Handcrafted Clay Roof Tiles
SPECIFICATION	Manufactured to BS EN 1304:2008
SIZE	265 x 165mm
MECHANICAL RESISTANCE (Flexural Strength)	COMPLIES (Mean 0.98 kN)
WATER IMPERMEABILITY	Category 1 (Mean 0.4)
DIMENSIONAL VARIATION	COMPLIES
CAMBER - Longitudinally CAMBER - Transversely	COMPLIES (Mean 2.5mm) COMPLIES (Mean 1.5mm)
SIZE - Longitudinally SIZE - Transversely	COMPLIES (Mean 270mm) COMPLIES (Mean 166mm)
TWIST	COMPLIES (Mean 5mm)
DURABILITY	LEVEL 1 (150 cycles)
PACKAGING	Shrink wrapped on wooden crates of 1070
PACK SIZE	1100 x 1100 x 1100mm
PACK WEIGHT	1.4 tonnes Approx.
USAGE	Always mix from several packs
PERFORMANCE	The recommendations of good practice made in the relevant British Standards regarding design and workmanship must be fully observed. Liability cannot be accepted for the performance of the product if used outside our recommendations. Guidance on the use of these roofing tiles in specific situations is readily available.

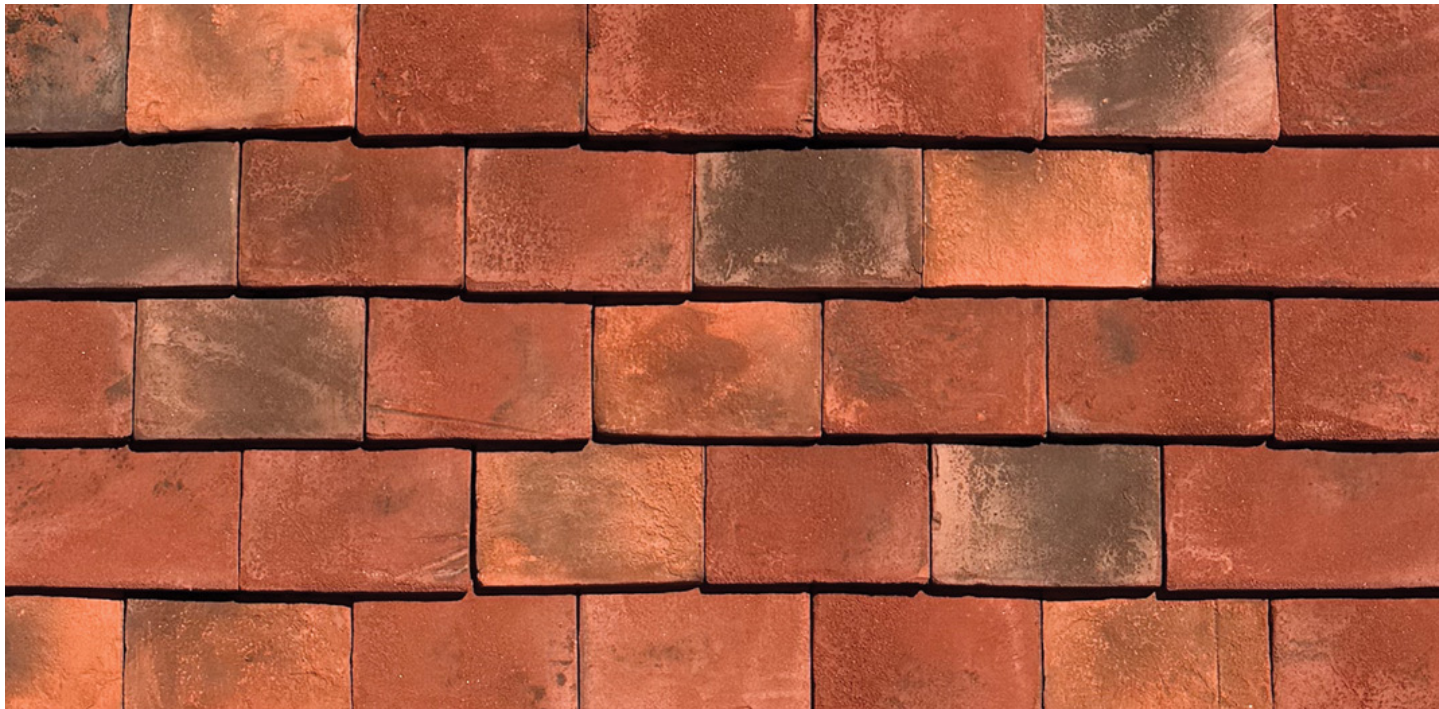

For more information on products, services, advice and technical guidelines please contact our sales team.

01746 330994
sales@imperialbricks.co.uk
www.imperialbricks.co.uk

Clay tiles are a natural product. Some variation on colour, texture and inclusions may occur.
 Technical data correct at time of issue. Always order samples before purchasing and follow good practice guidelines.



Sedex Member



VERISIO

LUCIDEON



UK
CA